




# TD 12: DIMMER NOTTEDI<sup>®</sup> - ELECTRIC LIGHT REGULATOR OF LUMINOUS FLUX

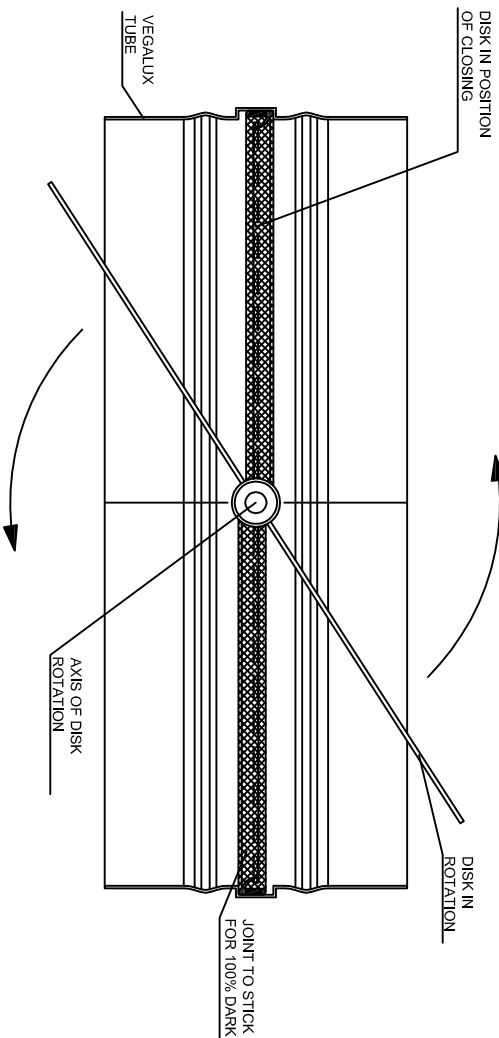



| DIAMETER | "LIVING" CODE | "MATT" CODE | Øe'    | Øe"    | X   |
|----------|---------------|-------------|--------|--------|-----|
| Ø 250    | 25NDLBT       | 25NDMABT    | 255,6  | 253,7  | 280 |
| Ø 375    | 38NDLBT       | 38NDMABT    | 378,15 | 376,24 | 370 |
| Ø 530    | 53NDLBT       | 53NDMABT    | 546,8  | 544,9  | 541 |
| Ø 650    | 65NDLBT       | 65NDMABT    | 674,2  | 672,3  | 668 |

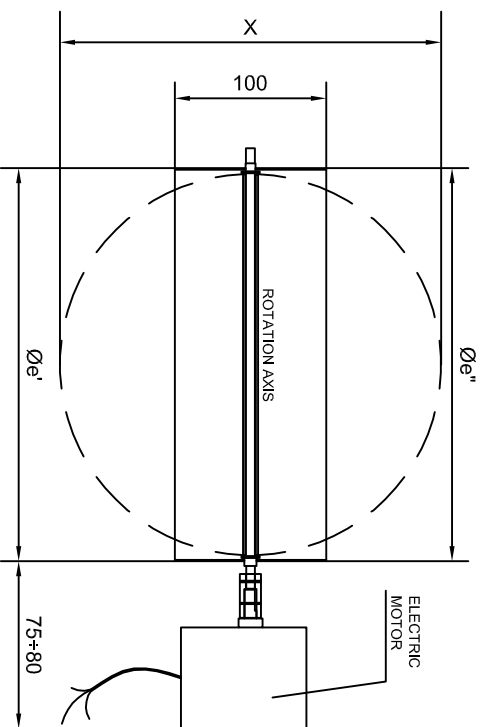

N.B.: ELECTRIC MOTOR: CE label, Berger Lahr STM 13  
BO 36/8 25NL 230 V, 50 Hz, IP40-43600367150.

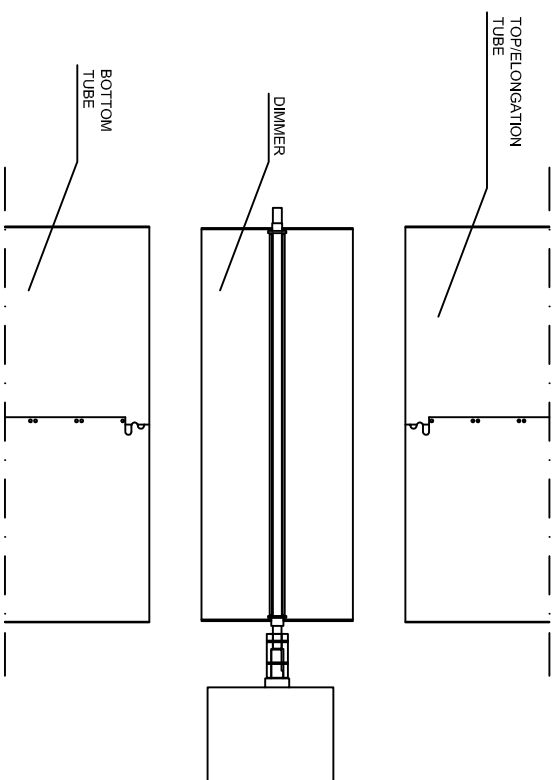

A) DIMMER WILL BE POSITIONATE INSIDE OF TUBES.  
B) DIMMER CAN BE INSERT ONLY BETWEEN A TOP TUBE AND ELONGATION TUBE OR BETWEEN 2 ELONGATIONS TUBES.

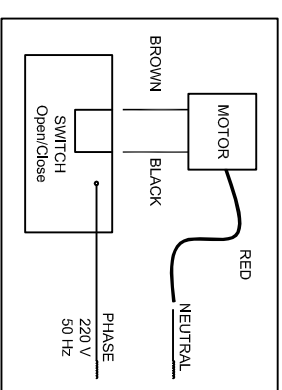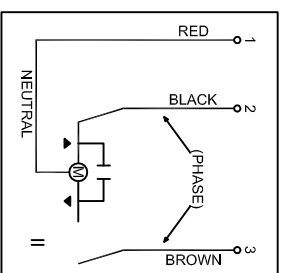

**Note :** For the switchers connection, see the instruction for the installation of Dimmer Nottedi<sup>™</sup>.