


Option 1

Base kit with spun aluminium flashing and 0-30 degree angle allows for the daylight to be angled downwards for better daylight distribution.

Upward-facing RIR reflector captures light from over-head.

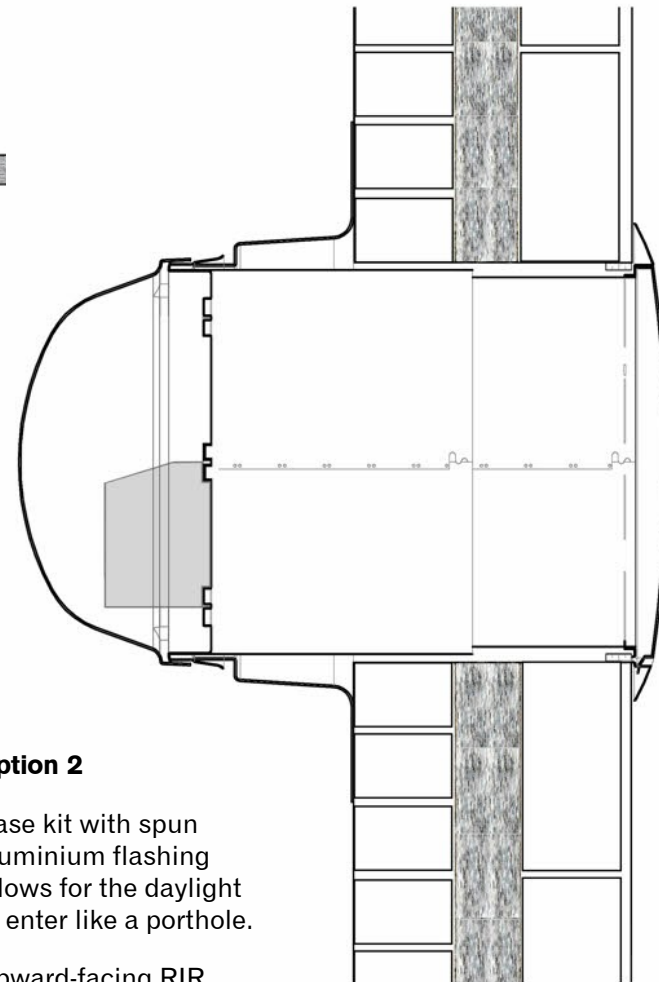

Option 2

Base kit with spun aluminium flashing allows for the daylight to enter like a porthole.

Upward-facing RIR reflector captures light from over-head.

D-25, 250mm diameter
D-38, 380mm diameter

Solarspot - Through wall system options

Syneco Limited The i:Centre, Howard Way, Newport Pagnell MK16 9PY T: 01908 299117 solarspot@syneco.co.uk www.solarspot.co.uk